Herbold

Beside-the-press granulators



Fig.: KG 16/35 TG and 16/15/TG




Collecting, storing and grinding sprues, off-spec parts or scraps from extrusion, as it is still quite normal in many factories, is an unnecessary and dated interruption of the manufacturing process. The beside-the-press granulators of Herbold Meckesheim GmbH are the logical link between waste disposal and production. Placed directly beside or under the production equipment in permanent operation, they save stock-keeping costs and personal expenses.

Specific feeding and disposal facilities for each application, and the large choice of accessories, allow to adapt the granulators to any production machine.



Herbold beside-the-press granulators

Model	kW	Α	В	С	D	Е	F	G	Н
16/15 TG	1.5	180	145	425	Ø 48	515	570	175	1140
16/25 TG	2.2	180	240	520	Ø 48	515	570	175	1140
16/35 TG	3.0	180	340	610	Ø 48	515	570	175	1140
21/30 TG	4.0	220	310	1150	Ø 48	400	570	175	1140
21/35 TG	4.0	220	360	1200	Ø 48	400	570	175	1145
21/40 TG	4.0	220	410	1250	Ø 48	400	575	175	1150
21/45 TG	7.5	220	460	1300	Ø 48	400	580	175	1155
21/50 TG	7.5	220	510	1350	Ø 48	400	585	175	1160
21/60 TG	7.5	220	610	1450	Ø 48	400	595	175	1170



Dimensions A - H in mm.

All Herbold beside-the-press granulators have the following features:


Housing:

Drive:

- sturdy welded steel construction
- hingable inserts for hopper and screen tightening, secured by limit switches
- thread bushing under screen to take a capacitive sensor
- mobile by locking steering rollers with roller bearings
- heavy-duty flat belt with three-phase motor and flywheel
- high-power gear motor with direct coupling on model KG 21/...

Cutting rotor:

4 cutting levels, rotor knives designed as turnable knives for double service life.

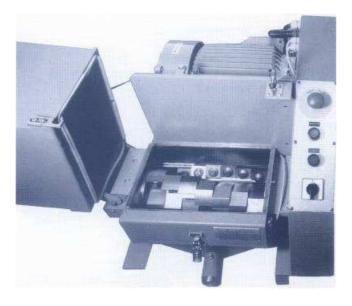

Specifications are not binding and subject to changes without notice.

Our product range



 Our US-subsidiary:

 Herbold Meckesheim USA

 Resource Recycling Systems Inc.

 130 Industria Drive

 North SmithField, RI 02896, USA


 Phone:
 +1 401 597 5500

 Toll-Free
 888 612 RRSI (7774)

 Fax:
 +1 401 597 5535

 E-Mail:
 Info@HerboldUSA.com

 Web:
 www.HerboldUSA.com



Optional features

custom-tailored hopper variations

mobile substructures for customers' tanks

connecting sleeve for suction device

sound insulation according to requirements



Herbold Meckesheim GmbH Industriestrasse 33 D-74909 Meckesheim Postfach 1218 D-74908 Meckesheim Tel.: +49 (0) 62 26 / 932-0 Fax: +49 (0) 62 26 / 932-495 E-Mail: Herbold@Herbold.com Internet: www.Herbold.com