

HERBOLD Debaler BA 63-130-2

The HERBOLD debaler has been specially developed for breaking up compressed bales, briquettes and also for the dosing of large material portions.

The material is placed on a horizontal feed belt with the aid of a forklift truck, although placement by means of a bale-gripper is particularly helpful, since in this case the binding wire can be removed as long as the bale still hangs from the clamps positioned above the feed belt. The bale is deposited in the direction of the press on the feed belt. The belt is designed to be able to hold several bales simultaneously.

The bale is transported forward by the feed force of the belt, and then broken up and separated by the two separately driven rollers, which are equipped with replace-able teeth. The individual pieces then fall onto an outlet belt, which serves as a buffer belt and transports the product to the next process stage.

The advantages of the HERBOLD debaler at a glance:




- specially careful breaking up of bales: the breaking off of PET bottle tops is almost completely avoided: an important consideration when corks and other foreign bodies have to be removed in a following screening machine or roller screen without PET loss.
- particularly effective breaking up of bales: residual adhesion of bottles to one another is almost completely prevented. A second process stage is only required for subsequent separation when processing briquettes.
- compact design, lower height difference to overcome between feed and outlet.
- convenient replacement of parts subject to wear, without welding or laborious dismantling of complete assemblies.
- outstanding price/performance ratio

The HERBOLD debaler is available with two drive variants

For normal compressed bales and performances of up to 2 t/h with 9.2 + 15 kW drive.

For highly-compressed bales and performances of up to 2-3 t/h with 2 x 15 kW drives for the rollers.



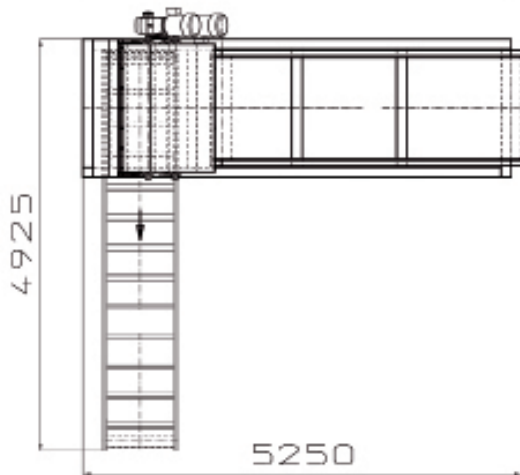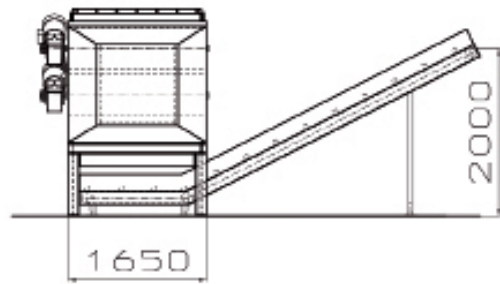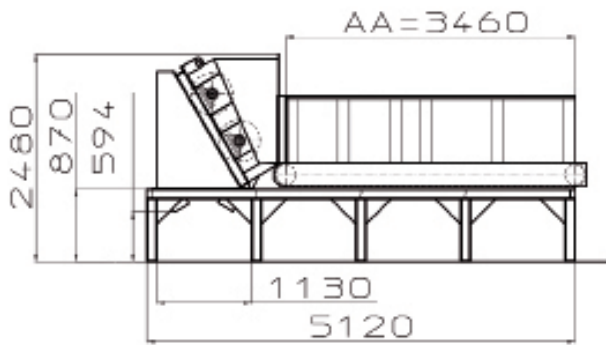

Our Product Range

Size Reduction

- Shredder
- Granulators
- Pulverizing Systems

Washing / Separation Systems & Components

- Pre-washing Units
- Friction Washers
- Separation Tanks and Hydrocyclones
- Mechanical and Thermal Drying
- Water Processing

Agglomeration

- Plastcompactors

Service

- Parts and Overhauls
- Inspections and Trouble Shooting
- Upgrades and Performance Service

Herbold Meckesheim GmbH • Fon: + 49 6226 932-0 • Mail: herbold@herbold.com • Web: www.herbold.com

Herbold Meckesheim USA • Fon: + 1 401 597 5500 • +1 888 612 RRSI (7774) • Mail: info@herboldusa.com • Web: www.herboldusa.com

Specifications are not binding and subject to change without notice. 10 / 2019